


PLEWS

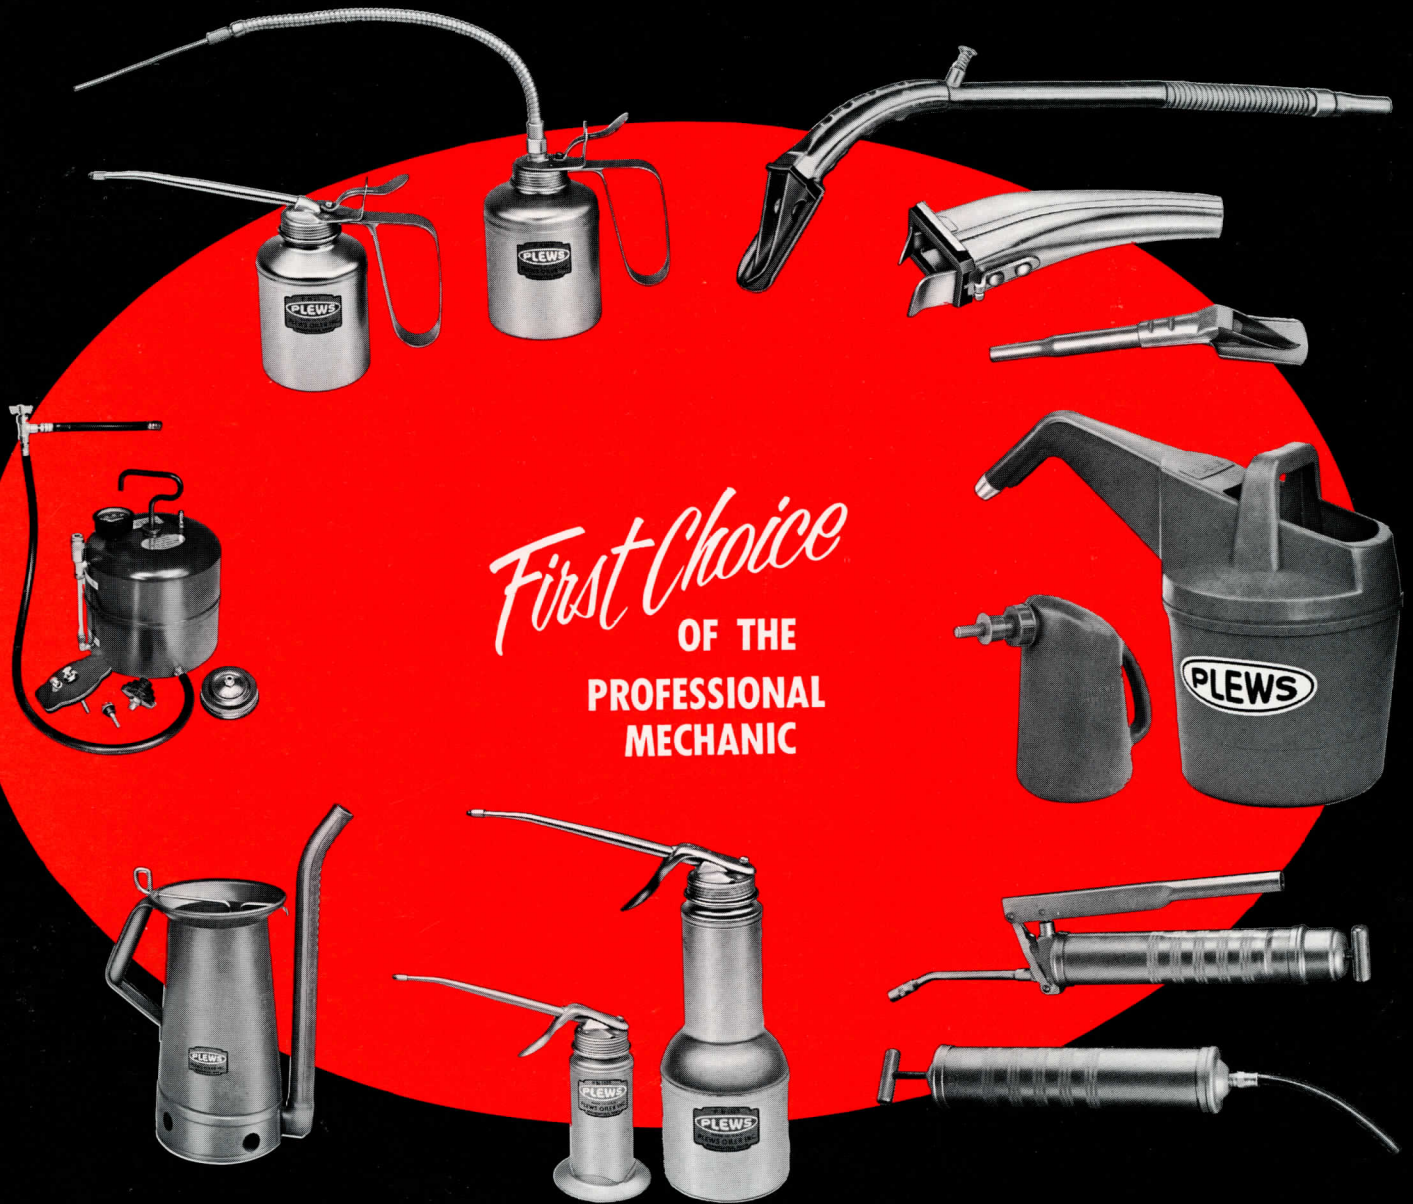

PLEWS OILER INC.

245 MARQUETTE AVE., MINNEAPOLIS, MINN. 55401

DISTRIBUTED BY

PLEWS *first choice* OF THE PROFESSIONAL MECHANIC

14-9 Flexible Hollow Wire Extension (Thread 8-32)



PISTOL OILERS & HOLDERS

- Fixed Spout – Detachable Tip
- Leakproof drawn bodies
- Comfortable pistol grips
- Powerful, positive pumps, steel ball valves

Model	Cap.	Holder	Finish	Pkg.	Weight per Doz.
52	4 oz.	None	Nickel	12	4 lbs.
N911B	6 oz.	Base	Nickel	1	8 lbs.
N911W	6 oz.	Wall	Nickel	1	8 lbs.
N1105	6 oz.	Base	Copper Lacquer	12	6 lbs.
N1105F	6 oz.	Base	"	12	6 lbs.
N1125	1 pt.	None	Nickel	1	12 lbs.
N1126	1 qt.	None	Nickel	4	14 lbs.

BH6 Base
Fits all 6 oz.
Pistol Oilers

WH6 Wall Holder
Fits all 6 oz.
Pistol Oilers

SELECTO-LUBE SET

Know "where it is and what's in it" . . . save time looking for the right lube, penetrant or solvent. *COLOR KEYED SELECTO-LUBE* shows at a glance what each oiler contains!

Model
1107

Packing
Individual Carton

Weight
22 lbs. per doz.

HEAVY DUTY PISTOL OILERS

Furnished with special "O" ring and closure tip for carrying in tool boxes. Absolutely leakproof. All spouts interchangeable.



Model	Capacity	Spout Furnished	Pkg.	Tip Furnished	Weight per doz.
965 DRS	6 oz.	Detachable 5" Rigid	1 Doz.	Detachable Ledged Cone Tip	8 lbs.
965 DFS	6 oz.	Detachable 13" Flexible	1 Doz.	Detachable Closure Tip	9 lbs.
965 D-12	6 oz.	12" Rigid	1		10 lbs.
970 DRS	1 pint	Detachable 5" Rigid	1	Detachable Ledged Cone Tip	12 lbs.
970 DFS	1 pint	Detachable 13" Flexible	1	Detachable Closure Tip	13 lbs.
982 DRS	1 quart	Detachable 5" Rigid	1	Special Fine Stream Nozzle	16 lbs.

Generator Oiler

Ideal for oiling generators—prevents shock. Long 12 inch rigid spout for hard to reach areas such as heat riser valves.

ADHESIVE GUNS & PUMP APPLICATORS

Plews models 61 and 62 – for standard containers, 61 for the 8 oz., 62 with adapter for the pint. Model 61 is furnished with detachable 4" welded steel spout and detachable adhesive applicator nozzle, unless otherwise specified. Can be supplied with 4" knife blade tip. Model 62 is furnished with detachable 4" steel spout and adhesive applicator nozzle with wire closure. Special purpose tips or nozzles can be furnished at extra cost. Nickel plated.



Model	Capacity	Pkg.	Wt. per Doz.	Model	Capacity	Pkg.	Wt. Per Doz.
54	6 oz.	1	8 lbs.	61K	Fits Stand. 8 oz. Can	None	3½ lbs.
55	1 pint	1	12 lbs.	62	With Adapter Fits Stand. Pint Can	None	6½ lbs.
61R	Fits Stand. 8 oz. Can	none	3½ lbs.				

HEAVY DUTY HANDLED OILERS


800 SERIES

This complete line of PLEWS HANDLED OILERS gives you the right unit for practically every lubricating job. Add the spouts and tips listed in chart below and you increase the versatility of these oilers. All rigid spout models have fixed tips.

Model	Capacity	Spout Furn.	Tip Furn.	Package	Wt. per doz.
834 DRS	1 pt.	Horizontal Rigid 9"	Fixed Ledged-Cone	4 to Ctn.	12 lbs.
834 DFS	1 pf.	Horizontal Flexible 15"	Detachable Hollow-Wire	4 to Ctn.	12 lbs.
838 DRS	1 pt.	Vertical Rigid 9"	Fixed Ledged-Cone	4 to Ctn.	12 lbs.
839 DRS	1½ pt.	Vertical Rigid 9"	Fixed Ledged-Cone	3 to Ctn.	14 lbs.
842 DRS	1½ pt.	Horizontal Rigid 9"	Fixed Ledged-Cone	3 to Ctn.	14 lbs.
845 DRS	1 qt.	Vertical Rigid 11"	Fixed Ledged-Cone	3 to Ctn.	18 lbs.
860 DRS	1 qt.	Horizontal Rigid 11"	Fixed Ledged-Cone	3 to Ctn.	18 lbs.
860 DFS	1 qt.	Horizontal Flexible 18"	Detachable Hollow-Wire	3 to Ctn.	19 lbs.

Detachable Rigid Spouts fitting ½-20 thread bases
 9" Rigid with fixed ledged-cone tip
 11" Rigid with fixed ledged-cone tip
 16" Rigid without ledged-cone tip
 26" Rigid without ledged-cone tip
 13" Rigid with 180° arched spout end
 60" Rigid with 180° arched spout end

Detachable Flexible Spouts fitting ½-20 thread bases
 15" overall, Flexible, with detachable Flexible Hollow Wire Extension (12-32) threads
 18" overall, Flexible, with detachable Flexible Hollow Wire Extension (12-32) threads

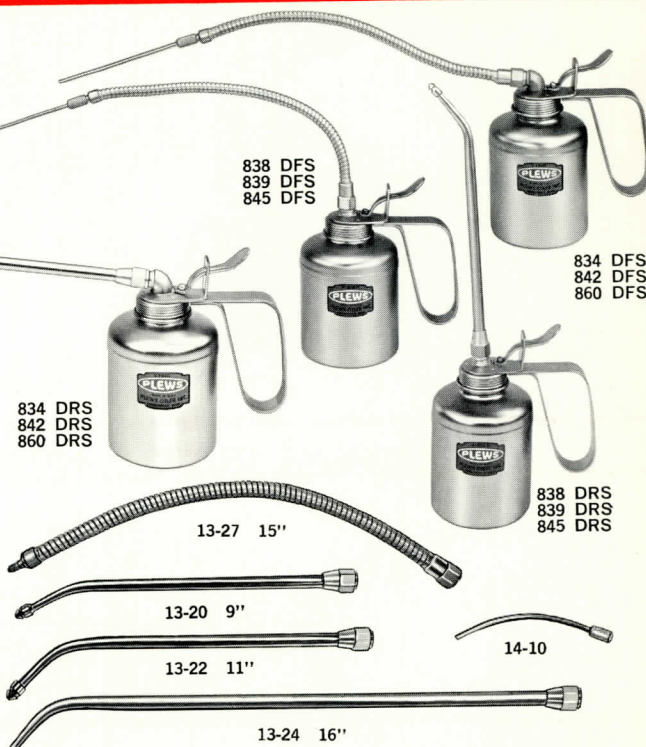

HANDLED OILERS

• Nickel Plated • Fixed Spouts – Thumb Lever Action • PLEWS Handled Oilers with fixed spouts are specially designed for general factory, shop and farm use • Deep-drawn steel bodies • Powerful pumps with bronze springs and steel ball valves • Ledged tips.

Model	Capacity	Fixed Spout	Finish	Package	Shipping Wt. per doz.
N10	¾ pint	Upright Rigid 7"	Nickel	6 to Carton	11 lbs.
N20	¾ pint	50° Angle Rigid 7"	Nickel	6 to Carton	11 lbs.
N25	¾ pint	15° Angle Rigid 7"	Nickel	6 to Carton	11 lbs.
N3335	1 pint	Vertical 9"	Lacquered	None	10 lbs.
N3340	1 pint	Angle 9"	Lacquered	None	10 lbs.



ECONOMY OILERS


2200 Series

Rigid and Flexible Spouts

Built for a lifetime of rugged use. Zinc plated steel spouts and triggers. Polypropylene caps impervious to all oils. Seamless steel blue lacquered bodies. All metal pumps. When tested by engineering, pumped over 33,000 gallons of oil. Pump operated over 5,000,000 times without visible wear to any part. No. 2200 has detachable flared base. All models available with 7½" flexible spouts.


Model	Cap.	Std. Pkg.	Weight per Doz.	Model	Cap.	Std. Pkg.	Weight per Doz.
2200	6 oz.	12	5 lbs.	2216	1 pint	6	9 lbs.
2200F*	6 oz.	12	5 lbs.	2216F*	1 pint	6	9 lbs.
2210	¾ pint	12	8 lbs.	2225	¾ pint	12	8 lbs.
2210F*	¾ pint	12	8½ lbs.	2225F*	¾ pint	12	8½ lbs.

*Flexible spout.

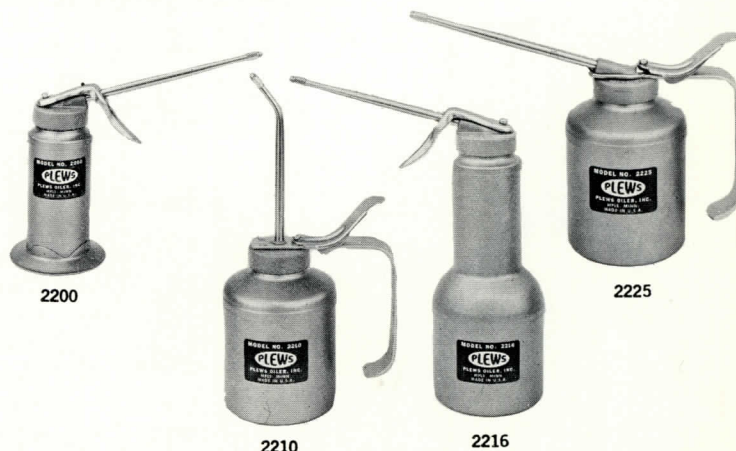

PLEWS *first choice* OF THE PROFESSIONAL MECHANIC

CONTROLLED FEED OILERS

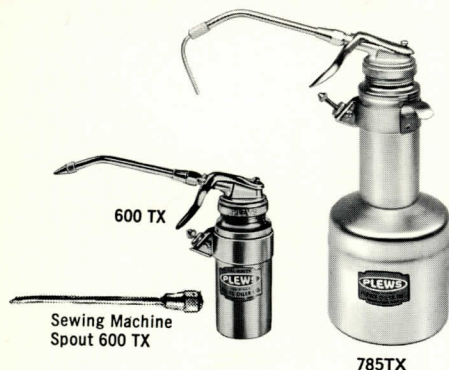

"TX" model oilers are designed for use in industries where uncontrolled oiling and dripping can damage the equipment or the material being processed. Pistol type . . . pump

Model	Capacity	Spouts
600 TX	6 oz.	2½", 4" or 7"
600 TX-SM	6 oz.	Special 4" Tapered
625 TX	1 pint	2½", 4", 7" or 12"
785 TX	1 quart	4" for Spindle Bolster Cups 24" for Cylinder Bearings also 12" and 17"

725 TX discontinued. Order 625 TX
775 TX discontinued. Order 785 TX

See price pages for additional spouts available for TX oilers.

stroke adjustment regulates flow of oil . . . detachable welded steel spouts . . . detachable pump tubes . . . detachable strainers for easy cleaning.

Nozzle	Feed Control	Wt. per Doz.
Steel	One Drop Clamp Style	11 lbs.
None	One Drop Clamp Style	11 lbs.
Steel	One Drop Clamp Style	13 lbs.
Bent	One Drop Clamp Style	15 lbs.
		18 lbs.

HIGH PRESSURE OILERS • 400 SERIES



No. 400 spray gun equipped with an integral self-cleaning device built into the tip, produces a fine mist spray with solvents—perfect for applying most sidewall cleaners. One quart capacity.

No. 401 fine stream high pressure oiler for lubricating and penetrating oils for use on springs, shackles and all hard-to-reach places. 6" spout, one-quart capacity.

Both the 400 and the 401 have impervious neoprene valves — durable die-cast pistol grip — a no-slip two finger trigger — full drawn nickel-plated body — 80 mesh brass strainer.

Model	Std. Pkg.	Wt. per Doz.
400	Individual Carton	24 lbs.
401	Individual Carton	24 lbs.


VITA NEEDLE TIPS



Hypodermic needle type extensions for precision lubrication

Model No.	Description	Std. Pkg.	Wgt. per Doz.
18V ¾"	8/32 thread fits N911, N1125, N25 and N1105 oilers. Side opening.	12	½ lb.
18P ¾"	8/32 thread fits N911, N1125, N25 and N1105 oilers. No side opening.	12	½ lb.
20P ½"	No side opening. 12/32 thread for 800 and 900 series oilers.	12	½ lb.
20P ¾"	No side opening. 12/32 thread for 800 and 900 series oilers. Available also with side opening (specify).	12	½ lb.

QUALITY STEEL BENCH OILERS

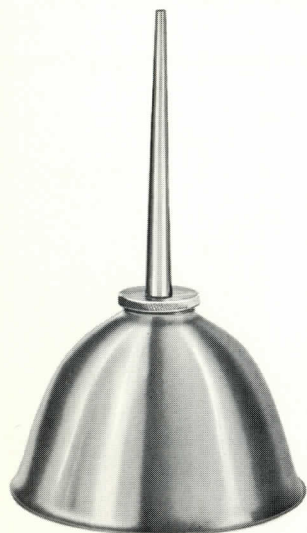

- Heavy-gauge, welded steel spouts
- Knurled steel spout bushing, with machine cut threads
- Drawn seamless steel body
- Bottom of special quality steel electrically welded to body. All spouts are interchangeable on all bodies
- Genuine leather washers
- Steel neck bushings, with machine-cut threads
- Guaranteed leak-proof.

EXTRA SPOUTS

Customarily furnished as shown. Specify "S" for straight spout or "B" for bent spout if other style is desired.



Gem No.	Plews No.	Length	Type	Wt. Doz.
215-S	504-S	4"	Straight	15 oz.
216-B	506-B	6"	Bent	1 lb., 2 oz.
217-B	509-B	9"	Bent	1 lb., 6 oz.
218-B	512-B	12"	Bent	1 lb., 13 oz.
425-F	507½-F	7½"	Flexible	1 lb., 5 oz.

RIGID SPOUT OILERS

Gem No.	Plews No.	Trade Capacity	Size & Type Spout	Weight Per Doz.
1604	490-4	½ pint	4" Straight	3¼ lbs.
1606	490-6	½ pint	6" Bent	3¼ lbs.
1609	490-9	½ pint	9" Bent	4¼ lbs.
1612	490-12	½ pint	12" Bent	4¼ lbs.
1704	491-4	½ pint	4" Straight	4½ lbs.
1706	491-6	½ pint	6" Bent	4½ lbs.
1709	491-9	½ pint	9" Bent	4½ lbs.
1712	491-12	½ pint	12" Bent	5½ lbs.
1804	492-4	¾ pint	4" Straight	5½ lbs.
1806	492-6	¾ pint	6" Bent	5½ lbs.
1809	492-9	¾ pint	9" Bent	6 lbs.
1812	492-12	¾ pint	12" Bent	6¼ lbs.
1904	493-4	1 pint	4" Straight	6¼ lbs.
1906	493-6	1 pint	6" Bent	6¼ lbs.
1909	493-9	1 pint	9" Bent	6¼ lbs.
1912	493-12	1 pint	12" Bent	7¼ lbs.

Packed One Dozen of a Size to a Carton

FLEXIBLE SPOUT OILERS

These flexible spout oilers use the same bodies as above and give long and satisfactory service. Flexible steel tubing, ¼" inside diameter, is used and seam is packed with asbestos lining. Base of spout is made from solid steel with machine cut threads.


Gem No.	Plews No.	Trade Capacity	Spout Length	Weight Per Doz.
1607-F	490-7½-F	½ pint	7½"	4¼ lbs.
1707-F	491-7½-F	½ pint	7½"	4¼ lbs.
1807-F	492-7½-F	¾ pint	7½"	5¼ lbs.
1907-F	493-7½-F	1 pint	7½"	6¼ lbs.

Packed One Dozen to a Carton

Better Service at Every Pump Island with this Pair AUTOMATIC BATTERY FILLER

BF30

One piece polyethylene body. Large 2¼ quart capacity. Completely automatic filling of all batteries. New improved tip has closure valve located at extreme end. Prevents *all* leakage and provides positive shut-off. Can be used with battery acid. Blue.



1336 (Flexible Tip for BF30)

RADIATOR FILLER

RC29

Made of tough polyethylene. Three gallon capacity. No seams to leak. Won't scratch or mar finishes. Impervious to oil, gasoline and anti-freeze. Not affected by heat or cold. Blue. Available in red on request.

MODEL NO.	STANDARD PACKAGE	WT. PER DOZ.
RC29	4	25 lbs.
BF30	6	6 lbs.
BF30F Battery Filler with Flexible Tip 1336	6	6 lbs.
1334 Tip only for BF30	12	1 lb.
1336	12	1 lb.



DRAIN PAN


751

3½ gallon capacity. 15" diameter, 4" height. Made of galvanized steel. Full drawn bottom. No seams.



TIRE AND TUBE TEST TANK

752

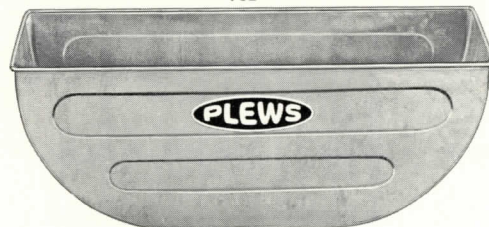


Heavy gauge galvanized. 31" long, 11" wide, 12" deep.

Model No.	Size	Std. Pkg.	Wgt. per doz.
750	6 gal.	2	72 lbs.
751	3½ gal.	12	28 lbs.
752		1	120 lbs.


RADIATOR DRAIN PAN

750

6 gallon capacity. 19" diameter. 6" height. Hot dipped galvanized. Side handles. Pouring lip with baffle plate.

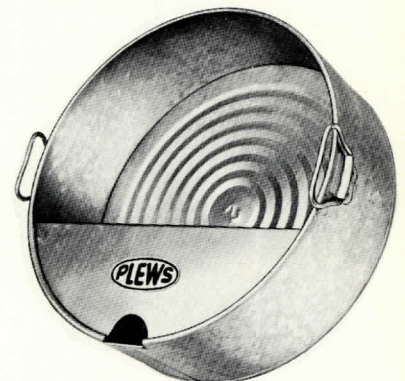

OIL SEAL INSTALLATION KIT

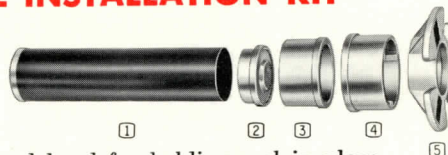


Features magnetized head for holding seal in place. Hollow driving tool for over-the-shaft installation. Adapter ① for small thru bore mounting (using adapter ② as striking plate). Adapters ③ and ④ can be reversed for selection of closest seal O.D. Adapter ⑤'s 1.85 diameter opening affords mounting over spline and axle shaft.

Model	Std. Pkg.	Wt. per. Doz.
OS800	6	44 lbs.


MEASURING BRAKE FLUID DISPENSER

Dispenses brake fluid, or other liquids, approximately one ounce per stroke. Universal cap fits all gallon containers. 36 inches of neoprene tubing with check valve in the nozzle. No parts to rust or corrode. Skin packed with punched card for easy display.

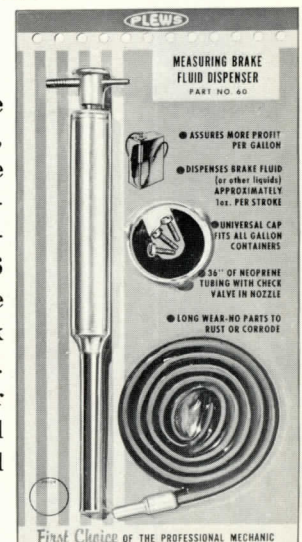

Model	Standard Package	Wgt. per Doz.
60	5	6 lbs.

TRANSMISSION FILLERS

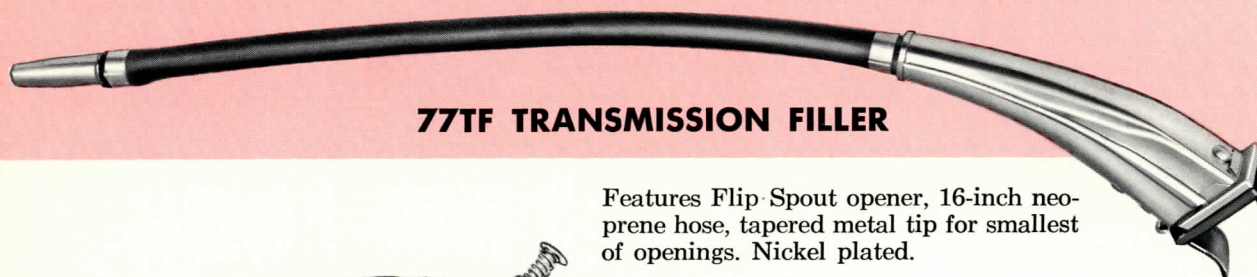

77TF TRANSMISSION FILLER

Features Flip-Spout opener, 16-inch neoprene hose, tapered metal tip for smallest of openings. Nickel plated.



N5PFS TRANSMISSION FILLER

Push button control for one hand operation. 25-inch metal flexible spout with tapered tip. Large 8 1/2-inch opener with neoprene gasket. Nickel plated.



N5PJD TRANSMISSION FILLER

The N5PJD with neoprene gasket is designed for opening and pouring automatic transmission fluids from one, four and five quart cans. Pinching hose stops flow, prevents spilling. Nickel-plated steel spout, long wearing blade and 16" high grade neoprene hose with steel nozzle.



14-83

ECONOMY UTILITY FILLER

FT7



All purpose fluid dispenser with 17" flexible tube, 6" mouth on funnel, 4" tapered dispensing spout with 1/2" outside diameter for small openings. Equipped with 80 mesh screen for greater safety.

FUNNEL TYPE TRANSMISSION FILLER

FT6

Equipped with a tempered steel cutting blade, an 18" flexible spout with a tapered tip and an 80 mesh screen for dirt protection. Lacquered finish.


MODEL	SIZE	STD. PKG.	WT. PER DOZ.
77TF	25" overall	1	16 lbs.
N5PFS	25" overall	1	18 lbs.
N5PJD	23" overall	6	9 lbs.
FT6	18" spout	2	30 lbs.
FT7	17" spout	12	12 lbs.
14-83	gasket only for N5PFS	12	1 lb.
14-84	gasket only for N5PJD	12	1 lb.
14-87	gasket only for 77TF	12	1 lb.

OIL SPOUTS

The NEW Plews FLIP•SPOUT offers extra length for hard to reach places. Large $\frac{3}{4}$ " inside diameter opening for faster pouring, leak proof gasket, hardened steel cutting spear for longer life and positive gripper for rim of can. For PLASTIC, fibre, tin-plate and aluminum cans. Nickel plated. Individually packaged. Operates as simply as a beer can opener.


Plews oil spouts are made of high-quality steel and have sharp, hard, long-wearing cutting blades. The N5P (nickel plated) has a new leakproof patented neoprene gasket — makes a perfect seal on one quart and five quart cans. The N5PJ (nickel plated) also has the neoprene gasket and improved thumb grip. Fits up to five quart cans. The 10PCS is handy for 4-ounce to one quart cans and has a spout cap. The 12ACS has extension with small tapered tip.

MODEL	SIZE	STD. PKG.	WT. PER DOZ.
77		12	7 lbs.
N5P	8½"	12	8 lbs.
N5PJ	7½"	12	6 lbs.
12ACS	7½"	12	2½ lbs.
10PCS	4"	12	1½ lbs.
14-83	gasket only for N5P	12	1 lb.
14-84	gasket only for N5PJ	12	1 lb.
14-87	gasket only for 77	12	1 lb.
77-3	repair kit for 77	1	2 lbs.

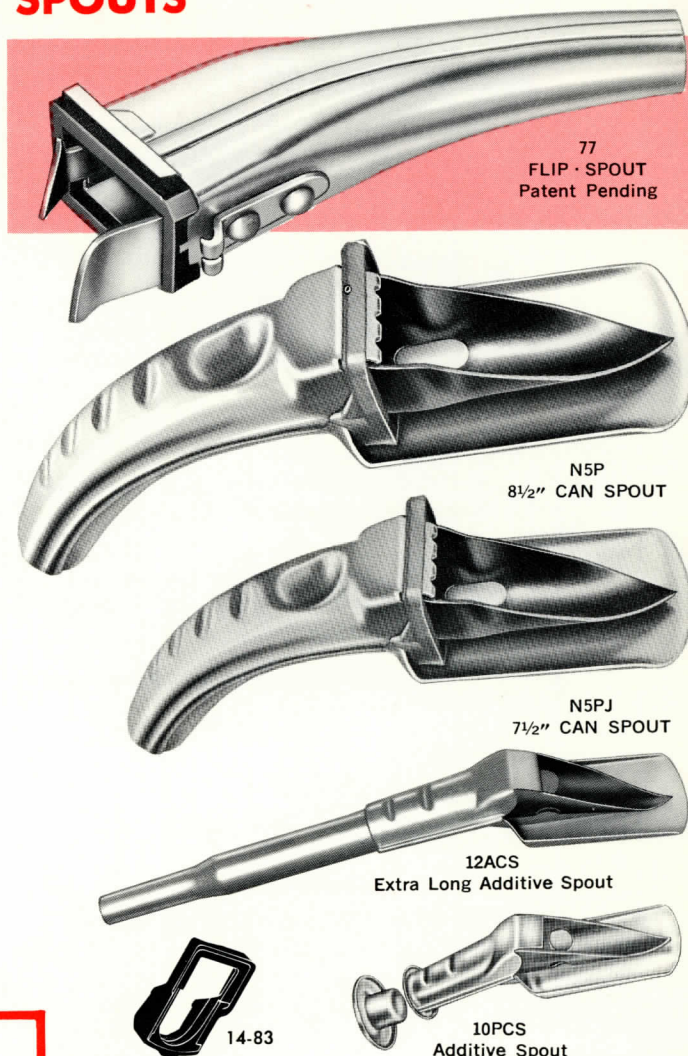

ECONOMY OIL SPOUTS

Zinc Luster Finish — For cans up to and including five quarts

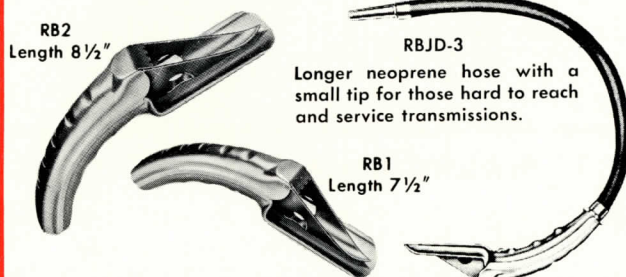

This economical spout, in Plews' familiar zinc luster finish is rugged and durable, and designed to allow for complete drainage of the oil can. Made of quality steel and has a sharp and durable blade.

Backed by Plews' famous guarantee and 40 years of experience in manufacturing quality products for dispensing oil, this new economy oil spout is "tops" — yet competitively priced.

MODEL	SIZE	STD. PKG.	WT. PER DOZ.
RB1	7½"	12	6 lbs.
RB2	8½"	12	8 lbs.
RBJD-3	23" overall	6	11 lbs.


COUNTER DISPLAY DISPENSER

12 N5P Canspouts attractively packed in self-selling counter display dispenser. Can be easily refilled as fast as sales demand.




Model	Std. Pkg.	Wgt. Per Carton of 12
D5	1	8 lbs.


HEAVY DUTY GREASE GUNS

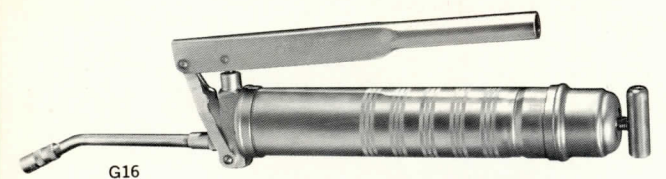

G16

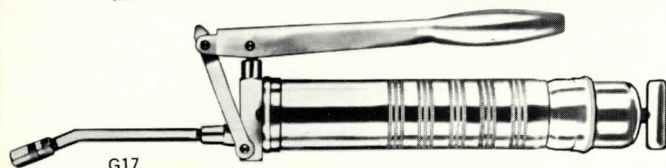

G17

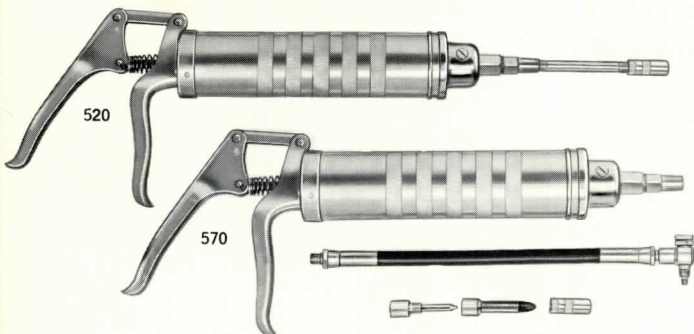

520

570



Angular Coupler Kit 520-1

Swivel coupler arrangement allows operator to reach fittings around corners (right).



No. 28D Standard Hydraulic Coupler for G16, G17, 520, 570 Grease Guns, RF26 and LA21.

No. 206 12" Flexible Hose for G16, G17, 520, 570 Grease Guns, and LA21. Also available 18" length.

G16 Bulk Only

Standard Lever Bulk Grease Only

Bright, zinc-plated finish, spring primed, heavy duty, develops up to 10,000 psi, efficient, leakproof, economical.

G17 Cartridge Gun

Versatile, Heavy Duty Spring Primed

Combination cartridge or bulk grease. Bright, zinc-plated finish, develops up to 10,000 psi, double cup two-way plunger.

Models 520 and 570 Pistol Grip Grease Guns

have unique new design for greasing those out of the way fittings on modern compact machinery. Streamlined, better balanced, less bulky, more convenient to operate. Light weight, one hand operated, with ample pressure and sufficient volume per stroke. For standard grease cartridge or bulk grease. All steel construction with bright zinc plated finish. Model 570 equipped with 12 inch neoprene hose and four adapters for specialized lubrication of late model cars.




GGH

GREASE GUN HOLDER

Easily mounted on farm machinery, wall and equipment. Fits any grease gun, suction gun, or barrel pump with standard 2 1/4" O.D. barrel.

Model	Std. Pkg.	Wt. Per Doz.
G16	1	46 lbs.
G17	1	51 lbs.
28D	12	1 1/2 lbs.
206-12	12	3 lbs.
206-18	12	4 lbs.
520	1	44 lbs.
520K (with angular coupler)	1	46 lbs.
570	1	48 lbs.
520-1	6	6 lbs.
GGH	12	4 lbs.

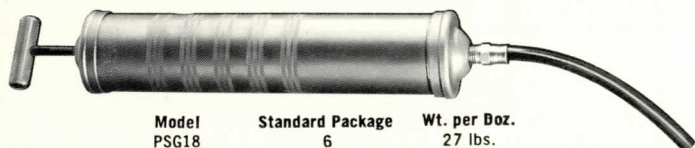


Model PSG18

Standard Package 6

Wt. per Doz. 27 lbs.

HEAVY DUTY SUCTION GUN

1 1/4 pint capacity . . . vinyl plastic flexible hose makes it easy to use in those hard-to-reach places. Will handle all oils, gas, fuel oil, kerosene and other non-corrosive fluids. Standard package of six with each gun individually packaged.

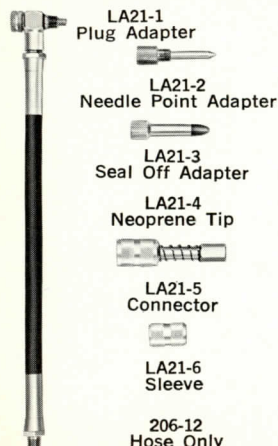

LA21-1 Plug Adapter

LA21-2 Needle Point Adapter

LA21-3 Seal Off Adapter

LA21-4 Neoprene Tip

LA21-5 Connector

LA21-6 Sleeve

206-12 Hose Only

LUBRICATING ADAPTER KIT


LA21

Complete lubrication of all cars having removable plugs and slotted screws instead of fittings. Three adapters, 12" flexible hose, quick coupler and extra sleeve. Use on hand operated grease guns.

Model	Std. Pkg.	Wt. per Doz.
LA21	2	12 lbs.

Packed in poly bag for display

PLASTIC GREASE GUN

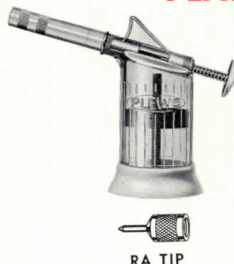


RA TIP

Functional, trouble-free, all-purpose, as modern as push button control. Develops up to 3,000 lbs. pressure per square inch. The 3 inch straight nozzle makes easy work of those hard-to-reach grease fittings. Made of tough tenite, stands by itself. Fits hands. RA Tip for permanent type lube fittings available.

Model	Std. Pkg.	Weight Per Dozen
AP 202	6	7 lbs.

LIFT DRAIN

Plews heavy-duty lift drain, white enamel finish — 5 gallon capacity. Adjustable telescoping tube from 40½" to 67" overall height. 12 inch funnel. 5 gallon container has large 2" pour spout for fast emptying. Available in red upon request.


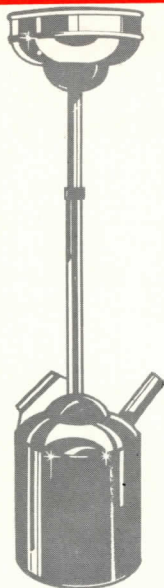


Model	Std. Pkg.	Wgt. Per Dozen
LD30	1	156 lbs.

TUBE • LUBER GREASE GUN


Handy, easy way to use the tube lubricants recommended by manufacturers for such items as out-board motors, inboard motors, lawn mowers, snow plows, chain saws, power tools, fractional HP engines. The standard tip fits all Zerk and Alemite fittings. For all permanent type lube fittings the special RA Tip is available.

MODEL	STD. PKG.	WT. PER DOZ.
303	12	6 lbs.
RA Tip	None	

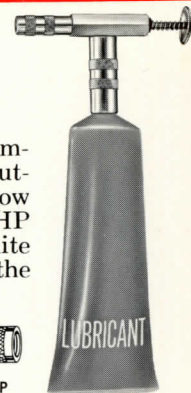

BEARING WASHER


For faster and positive cleaning of bearings. Takes up to five inch bearing. Safer handling. Prevents bearing from being nicked or scratched. Completely cleans out old grease and foreign matter. Zinc luster finish.

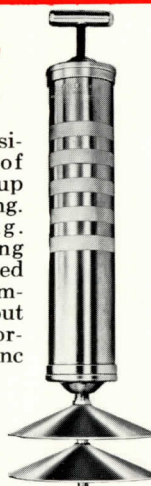

Model	Std. Pkg.	Weight Per Doz.
BW26	1	42 lbs.

BEARING PACKER

This new, heavy-duty bearing packer makes packing front bearings fast, clean and efficient. It is equipped with a standard grease fitting and may be used with either power or hand operated grease guns. Will handle bearings from a minimum of 25/64 inches I. D. to a maximum O. D. of 5 inches and with a minimum and maximum working height between cones from zero to 2½ inches.



Model	Std. Pkg.	Weight Per Dozen
BP 24	6	14 lbs.

UNIVERSAL BATTERY CARRIER




Patented locking device with extension arms give balanced carrying with positive lock on all batteries.

Model	Std. Pkg.	Wt. per Doz.
C32	12	5 lbs.

With display card


RIGID FLEX ADAPTER

For all control valves and hand guns. Consolidates four adapters in one unit. Skin packaged for point of purchase selling.




Model	Std. Pkg.	Wt. Doz.
RF26	1	11 lbs.
RF26-1	replacement hose	4½ lbs.

Includes needle point adapter 26-3



BLOGUNS & SPRAY CLEANERS

643P 10" spout
645P 4" spout

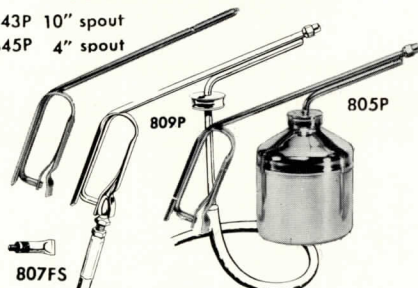

Snap onto Schrader, Dill and most other chucks. The 809P (with a 6-foot hose) can be used with drums for cleaning or spraying larger areas.

Model	Std. Pkg.	Weight Per Doz.
643P Pistol Type, 10" spout	1	7 lbs.
645P Pocket Type, 4" spout	1	5 lbs.
805P Sprayer Cleaner	1	21 lbs.
809P With 6 foot hose	1	15 lbs.
807FS Spray Tip Nozzle		



BARREL PUMPS

BP16 Regular Duty

Ideal for industrial plants, farms, garages, filling stations, etc. Easy to install and operate . . . saves time . . . eliminates waste. Fits 15 to 55 gallon drums . . . heavy cast metal . . . 18 gauge heavy duty cylinder 1½" O.D. Adapter thread to fit 1½" to 2" bung hole . . . cast aluminum spout threaded to fit garden hose coupling . . . metallic piston valve for long carefree service.

BP20 Heavy Duty (replaces BP19)

New base for easier and faster attachment to drum. Eliminates stretching of gasket when tightened down. Moulded nylon plunger . . . valve and seal are not affected by any non-corrosive liquids such as lacquer thinners, solvents, gasoline, anti-freeze, etc. Telescoping suction tube adjusts to 15 to 55 gallon drums . . . zinc plated . . . ¼ of a pint per stroke . . . 2" pipe threaded base . . . spout threaded for standard garden hose coupling.

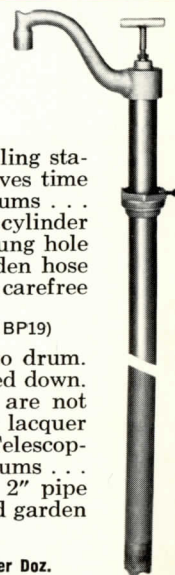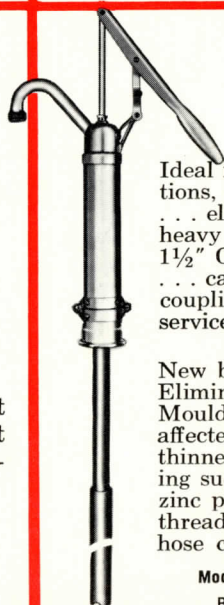

Model No.	Std. Pkg.	Wt. per Doz.
BP16	2	60 lbs.
BP20	1	84 lbs.

BP20

BP16

MEASURES AND FUNNELS

ADJUSTO MEASURES

Improved thumb lever for positive action. Flared spill proof top. Long lasting finish. Improved automatic valve closer. Free swinging and leak proof spout. Available with rigid or flexible spouts.



6601
6602
6604
6605

6601F
6602F
6604F
6608F

Model	Size	Spout	Packed	Weight Per Doz.
6601	1 Qt.	Rigid	1	30 lbs.
6602	2 Qt.	Rigid	1	36 lbs.
6604	4 Qt.	Rigid	1	42 lbs.
6605	5 Qt.	Rigid	1	48 lbs.
6601F	1 Qt.	Flexible	1	24 lbs.
6602F	2 Qt.	Flexible	1	27 lbs.
6604F	4 Qt.	Flexible	1	36 lbs.
6608F	8 Qt.	Flexible	1	60 lbs.

GALVANIZED MEASURES

State approved measures. Spill proof top. Rigid and flexible spouts. Hot dipped galvanized. For oil and anti-freeze.



4401
4402
4404

4401F
4402F
4404F

Model	Size	Spout	Packed	Weight Per Doz.
4401	1 Qt.	Rigid	6	12 lbs.
4402	2 Qt.	Rigid	6	16 lbs.
4404	4 Qt.	Rigid	6	24 lbs.
4401F	1 Qt.	Flexible	6	12 lbs.
4402F	2 Qt.	Flexible	6	18 lbs.
4404F	4 Qt.	Flexible	6	26 lbs.

FUNNELS Made of 28 gauge tite coat galvanized steel. No. 11 galvanized wire rolled in top. Extra bead in band for rigidity. Hand soldered.



**F1
UTILITY
FUNNEL**

2 qt. capacity
3/4" outlet
8" diameter
9" height

**F2
OFFSET
FUNNEL**

7 qt. capacity. 1 1/4" outlet.
8" diameter, 15" height.
60 gauge brass screen soldered in bottom.

**F3
UTILITY
BANDED
FUNNEL**

3 qt. capacity
3/4" outlet
8" diameter
12" height

**F8
LOCK-ON
TRACTOR
FUNNEL**

10 qt. capacity, 1 1/4" outlet, 10" diameter, 10 1/2" height. 60 gauge brass screen in bottom. Hot dipped galvanized. Heavy duty and long life.

**F4
TRACTOR
FUNNEL**


8 qt. capacity
1 1/4" outlet
10 1/2" diameter
11 1/2" height

**F5
HEAVY DUTY
TRACTOR FUNNEL**

10 qt. capacity, 1 1/4" outlet, 12" diameter, 13 1/2" height. 60 gauge brass screen soldered in bottom.

Model No.	Size	Std. Pkg.	Wgt. Per Doz.
F1	2 qt.	12	11 lbs.
F2	7 qt.	6	24 lbs.
F3	3 qt.	6	16 lbs.
F4	8 qt.	6	20 lbs.
F5	10 qt.	6	40 lbs.
F8	10 qt.	6	25 lbs.

SOLDERING IRONS

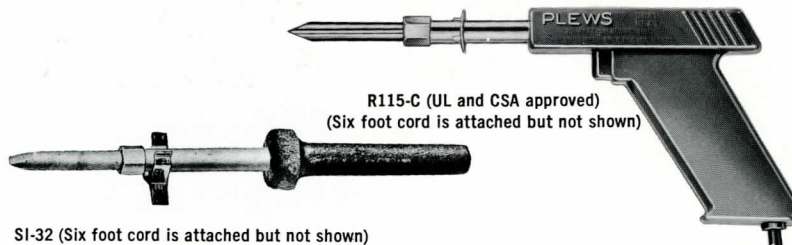


	Model	Size	Std. Pkg.	Wgt. Per Doz.
	R115-C	10 " with 6' cord	1	10 lbs.
	SI-32	10½" with 6' cord	1	6½ lbs.
	PE-33	7½" with 6' cord	1	5 lbs.

VARI-HOT PISTOL SOLDERING IRON — R115 C (with booster control for extra heat) Hermetically sealed dual heating element located entirely within the tip. Requires only 50 watts to maintain tip temperature of 530 degrees. Booster button increases power to 100 watts. Tip temperature can be controlled up to 1000 degrees F. Attached rest. Operates on 115 volts, 50-100 watts, AC-DC. Seven interchangeable iron plated tips available, which also fit SI 32.

VARI-HOT STRAIGHT IRON — SI 32. Heavy duty industrial iron. Four interchangeable heating elements provide four different operating temperatures. No. SI-32-25 550°F at 25 watts; No. SI-32-40 650°F at 40 watts; No. SI-32-55 825°F at 55 watts; No. SI-32-75 910°F at 75 watts. Heating elements located entirely in the tip. Attached rest. Operates on 115 volts, 25-75 watts, AC-DC. Seven interchangeable tips available which also fit R115-C.

VARI-HOT PENCIL IRON — PE 33. Feather weight iron ideal for high speed industrial production. Working tip temperature of over 800 degrees F. Operates on 115 volts, 18 watts, AC-DC. For interchangeable tips, available see below.

Stand Iron for sub-assembly production work available.

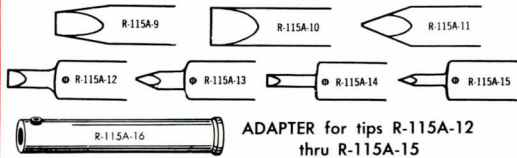

EXTRA TIP SHAPES

All seven tip shapes R-115A-9 thru R-115A-15 are available for both model R-115-C and straight iron S-32. The four tip shapes R-115A-12 thru R-115A-15 are the only ones that fit pencil iron PE-33.

EXHAUST CAPS




Automatic protection for vertical exhaust pipes. Keeps out dust, insects, rain, snow. For use on tractors, hay balers, generators, combines, compressors, road machinery, outside power plants, etc.

- Heavy gauge steel with nickel finish for longer life.
- Absolute seal on exhaust when equipment is at rest. Wind cannot lift cap.
- A special heat treated bushing assures opening and closing at high and low temperatures.
- Simple, quick attachment.
- Sizes to fit every exhaust pipe. Available in thirteen standard sizes:

ONE MAN BRAKE BLEEDER

The fast, efficient, economically priced Plews Brake Bleeder has a heavy-duty 18 gauge steel body with seamless bottom copper struck internally and externally for positive rust-proofing. The 36 inch hose has shut-off valve. All brass fittings. Equipped with universal master cylinder adapter BB3; Chrysler, GMC and Chevrolet truck adapters BB4; Ford and Falcon adapter BB14. Special Rambler adapter BB17 and special General Motors cars adapter BB18 are available. BB19 for disc brakes. Easy-to-read pressure and sight level gauges. Safety pop-off valve is factory set at 40 pounds.

MODEL	STD. PKG.	WEIGHT PER DOZ.
BB 22	1	78 lbs.
BB 3	1	
BB 4	1	
BB 14	1	
BB 17 (optional)	1	
BB 18 (optional)	1	
BB 19 (optional)	1	



BB 14



BB 17 (optional)



BB 18 (optional)



BB 19 (optional)



Size Number	Mini- mum Exhaust O.D.	Maxi- mum Exhaust O.D.	Standard Package	Weight per Dozen
X— 1	1¼" to 1 ⅝"		1	6 lb.
X— 2	1½" to 1 ⅞"		1	6½ lb.
X— 3	1¾" to 1 ⅞"		1	7 lb.
X— 4	2 " to 2 ⅜"		1	7½ lb.
X— 5	2¼" to 2 ⅝"		1	8 lb.
X— 6	2½" to 2 ⅞"		1	8½ lb.
X— 7	2¾" to 2 ⅞"		1	9 lb.
X— 8	3 " to 3 ⅝"		1	11 lb.
X—10	3½" to 3 ⅞"		1	12 lb.
X—12	4 " to 4 ⅜"		1	13 lb.
X—14	4¼" to 4 ⅞"		1	15 lb.
X—16	5 " to 5 ⅞"		1	15 lb.
X—20	6 " to 6 ⅝"		1	18 lb.

PLEWS
...first choice
OF THE
PROFESSIONAL
MECHANIC

MERCHANDISERS!

See Price Sheet for Contents and Prices

No. 40
Floor
Display



PLEWS


Special Offer

YOUR
CHOICE
Only

\$1.69

Bargain
Pak No. 1

SAVINGS UP TO 15%

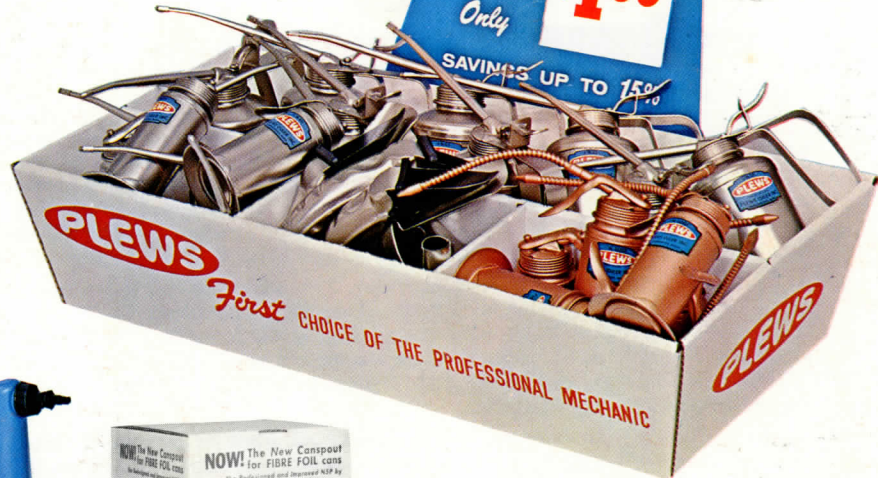

Display
Carton
D5

12 N5P Canspouts attractively packed in self-selling counter display dispenser. Can be easily refilled as fast as sales demand.



Wall Display No. 50



Wall Display No. 3